

Thank you for purchasing your new SKIMZ Biopellet Reactor that provides optimum performance with maximum safety and reliability.

Model	Feed Pump	Body Diameter (mm)	Biopellet Media	For Aquarium	Code
BR80	WT900	80	up to 400ml	up to 400 L	8121-00
BR100	WT1200	100	up to 1,000ml	up to 1,000 L	8122-00

MAINTENANCE

It is recommended to clean the reactor when new media is replaced. The feed pump and water inlet control valve should be cleaned to ensure that it does not blocked with debris from the tank or calcium deposits.

WARRANTY POLICY

Skimz Singapore LLP (Company) warrants this product to the original purchaser against defective material and workmanship that occurs during normal use of the body for two (2) years and one (1) year warranty on the pump. Company will, at Company's option, either repair or replace without charge.

PRODUCTS COVERED BY WARRANTY

All Skimz equipment is covered by warranty from the date of purchase.

To be effective, register your product at: www.skimz.sg/support/register.html within 14 days of the product's purchase date.

Exclusions:

Damage resulting from accident, misuse, lack of reasonable care, subjecting the product to abnormal working conditions or any other failure not resulting from defects in materials or workmanship.

Damage caused by tampering, modification or attempted repair by anyone other than the Company.

Transfer of product to someone other than the original purchaser.

Bring the product to your nearest Skimz dealer or ship the product, together with a copy of the purchase receipt or other evidence of purchase to:

Skimz Singapore LLP
5 Ang Mo Kio Industrial Park 2A
#04-30 AMK Tech II
Singapore 567760


You must pay any postage, shipping charges, insurance costs and other expenses to return the product to Skimz. However, if the necessary repairs are covered by the warranty, Company will pay the return shipping charges.

QUICK INSTALLATION GUIDE




BIOPELLET REACTOR



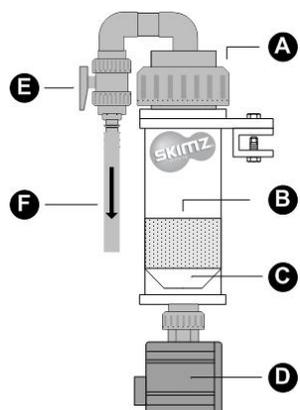


- A. Quick release coupling
- B. Reactor media
- C. Dispersion cone
- D. Feed pump
- E. Water outlet valve
- F. Outlet hose

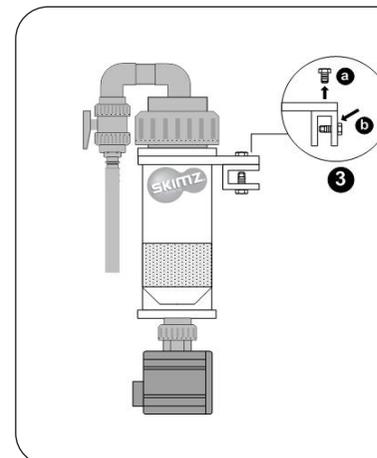


STEP 3

1. BR80 can be used inside the aquarium or in-sump.
2. It comes with two holding systems for individual fixing, and is adjustable in height.
3. Remove the (a) screw and turn the (b) fixing bracket.

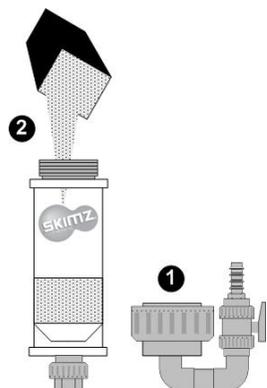


STEP 1

1. Open the lid by removing the quick release coupling.
2. Fill the reactor with required volume of media and reattach the coupling.

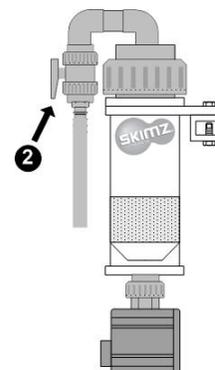


STEP 4

1. Position the reactor inside the sump.
2. Ensure the valve of the feed pump is closed and outlet hose is in the sump tank.

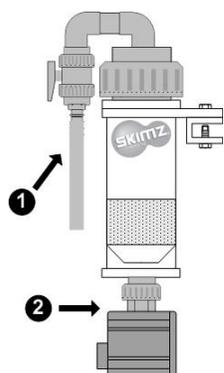

STEP 2

1. Attach the flexible hose to outlet of the reactor.
2. Connect the pump to inlet of the reactor.

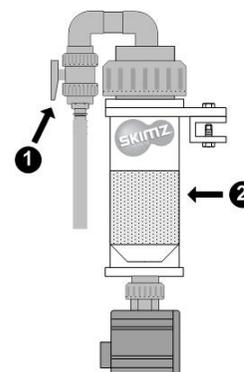

STEP 5

1. Switch on the feed pump and open the valve slowly.
2. Adjust the flow rate until all the media is tumbling, so that it will keep the media free of biofilm.